


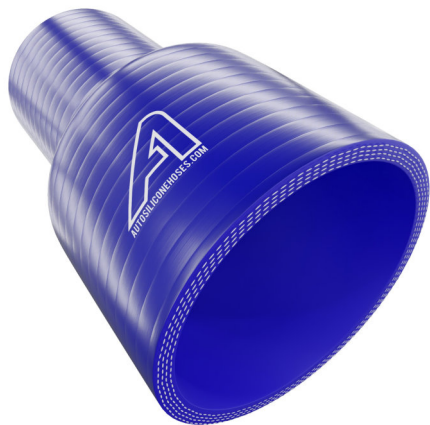

SKU - SSR

Operating Temperature
-50°C to +250°C

Peak Temperature
+250°C

Inner Layer Material
Smooth Extruded Silicone Compound

Reinforcement
Polyester Braids

Outer Layer Material
Silicone

Standard
SAEJ20R3

Colour



[View Product Online](#)

Hoses UK

Unit 5 Holme Bank Mills
Station Road
Mirfield
West Yorkshire
WF14 8NA

Contact:

01924 496111
web@hosesuk.co.uk
hosesuk.co.uk

HOSESUK
WHOLESALE

Silicone Straight Reducer

Inside Diameter	Outside Diameter	Wall Thickness	Working Pressure	Bursting Pressure	Bending Radius	Number Of Ply	Length
6.5mm	15.5mm	4.5mm	12.33 Bar	37 Bar	16mm	3	127mm
8mm	17mm	4.5mm	11.67 Bar	35 Bar	16mm	3	127mm
9.5mm	18.5mm	4.5mm	11.67 Bar	35 Bar	16mm	3	127mm
11mm	20mm	4.5mm	9 Bar	30 Bar	16mm	3	127mm
13mm	22mm	4.5mm	8.33 Bar	27 Bar	16mm	3	127mm
16mm	25mm	4.5mm	7.17 Bar	25 Bar	18mm	3	127mm
19mm	28mm	4.5mm	6.5 Bar	19.5 Bar	18mm	3	127mm
22mm	31mm	4.5mm	5.8 Bar	17.4 Bar	20mm	3	127mm
25mm	34mm	4.5mm	5.5 Bar	16 Bar	30mm	3	127mm
28mm	37mm	4.5mm	5.33 Bar	16 Bar	30mm	3	127mm
30mm	39mm	4.5mm	5.33 Bar	16 Bar	30mm	3	127mm
32mm	41mm	4.5mm	5.17 Bar	15.5 Bar	32mm	3	127mm
35mm	44mm	4.5mm	5 Bar	15 Bar	35mm	3	127mm
38mm	47mm	4.5mm	5 Bar	15 Bar	35mm	3	127mm
40mm	49mm	4.5mm	4.83 Bar	14.5 Bar	35mm	3	127mm
45mm	54mm	4.5mm	4.67 Bar	14 Bar	40mm	3	127mm
48mm	57mm	4.5mm	4.5 Bar	13.5 Bar	45mm	3	127mm
51mm	62mm	5.5mm	4.5 Bar	13.5 Bar	51mm	4	127mm
54mm	65mm	5.5mm	4.33 Bar	13 Bar	60mm	4	127mm
57mm	68mm	5.5mm	4.33 Bar	13 Bar	60mm	4	127mm
60mm	68mm	5.5mm	4.17 Bar	12.5 Bar	60mm	4	127mm
63mm	71mm	5.5mm	4 Bar	12 Bar	63mm	4	127mm
65mm	74mm	5.5mm	3.85 Bar	11.5 Bar	65mm	4	127mm
68mm	79mm	5.5mm	3.6 Bar	11 Bar	65mm	4	127mm

Hose Distribution. Simplified.



Silicone Straight Reducer

Inside Diameter	Outside Diameter	Wall Thickness	Working Pressure	Bursting Pressure	Bending Radius	Number Of Ply	Length
70mm	81mm	5.5mm	3.5 Bar	10.5 Bar	65mm	4	127mm
76mm	77mm	5.5mm	3.5 Bar	10.5 Bar	65mm	4	127mm
80mm	91mm	5.5mm	3.33 Bar	10 Bar	70mm	4	127mm
83mm	94mm	5.5mm	3.17 Bar	9.5 Bar	70mm	4	127mm
90mm	101mm	5.5mm	3 Bar	9 Bar	70mm	4	127mm
102mm	113mm	5.5mm	2.8 Bar	8.5 Bar	70mm	4	127mm

SKU - SSR

Operating Temperature
-50°C to +250°C

Peak Temperature
+250°C

Inner Layer Material
Smooth Extruded Silicone Compound

Reinforcement
Polyester Braids

Outer Layer Material
Silicone

Standard
SAEJ20R3

Colour



[View Product Online](#)

Hoses UK

Unit 5 Holme Bank Mills
Station Road
Mirfield
West Yorkshire
WF14 8NA

Contact:

01924 496111
web@hosesuk.co.uk
hosesuk.co.uk

Hose Distribution. Simplified.